
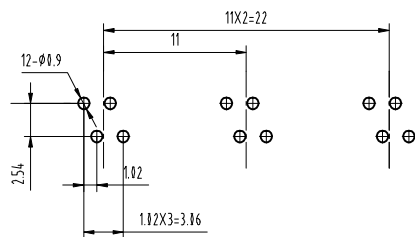
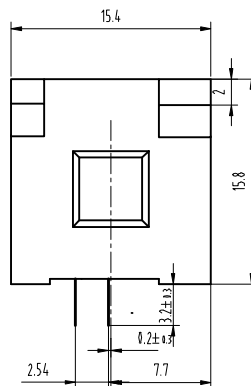
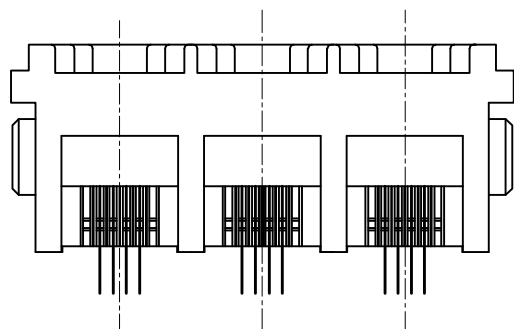


由 Autodesk 教育版产品制作

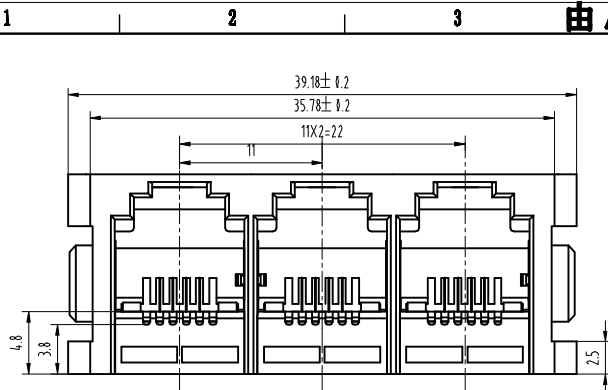

PC Board Layout
Component Side Shown

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.45\text{mm}$.
3.PLATING :GOLD PLATING $\text{Fu}'' 50\mu''$ OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
2.CURRENT RATING :1.5 AMP.
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C
2. OPERATION : 0? TO 70?.

PART NUMBER:

REV	MARK	ECN NO.	DESCRIPTION	NAME	DATE
A0	—	—	新圖制定		201/0/0

TOLERANCE UNLESS OTHERWISE SPEC		DESIGNED				TITLE : 5225-6P4C-1X3-180°	
BASIC DIMENSION	TOLERANCE	CHECKED		SIZE	A4	PART NO. :	
.X	±0.5			UNIT	MM	DRAWING NO. :	
.XX	±0.35	STANDARDIZED		SCALE	1:1	Coorle Technology	
.XXX	±0.25			WEIGHT			
ANGLES	±0.5°	APPROVED		SHEET	第 1 页 共 1 页		
				REV	A		